

Connect



Finally, it is possible to make the real occupancy of a desk visible.

The LED ring on our Connect shows at a glance the status of a desk:

Green : the desk is free and bookable

Red : the desk is occupied and non-bookable

Blue : the desk is occupied and non-bookable and the person at the desk does not want to be disturbed

IMPORTANT FEATURES

- ✓ Capacitive touch
- ✓ Glass top with LED-lighting
- ✓ Water-resistant
- ✓ Personal presets
- ✓ NFC/RFID check in

At an available desk, you log in via NFC/RFID to book the workplace. You can now also be found directly by other colleagues. With one push on the sitting or standing button on the Connect the desk automatically adjusts to the pre-programmed personal sitting or standing height.

Required accessories:



LICENSE

Desk manager license per desk



GATEWAY

Multi gateway Mesh to GoBright platform



CONNECTION CABLE

Connection cable Linak or USB powered

Optional accessories:



SENSOR

For reliable analysis data to realise most efficient use of all desks



GLOW

For extra visibility on partition walls and monitors



GoBright
Creating availability

LED ring

Sitting button ↴

Standing button ↱

Up button* ⬆

Down button* ⬇

Middle button ⊖

Save settings ⊖

Free (green), Occupied (red), Do not disturb (blue)

Go to personal sitting height


Go to personal standing height

Desk goes up

Desk goes down

One push: Do not disturb

Hold for three seconds and then push sitting or standing button: save personal sitting or standing height

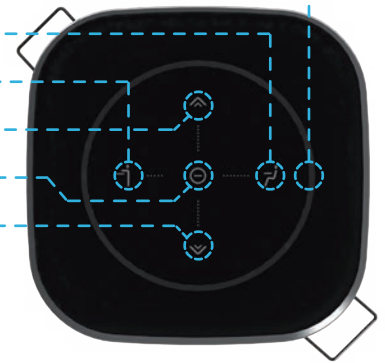

ARTICLE NUMBER

DCF1-10P

GoBright Connect – 10 pack*

ACCESSORIES

BB-DS+M+A

GoBright desk manager license per desk

CC1-LINAK-LP-10P

GoBright connection cable LINAK control box, LINAK powered and control box, 140 cm - 10 pack*

CC1-LINAK-USB-10P

GoBright connection cable LINAK control box, USB powered and control box, 140 cm - 10 pack*

DOSC1-10P

GoBright desk occupancy sensor, cabled - 10 pack*

GLC1-10P

GoBright Glow - 10 pack*

MGW101-DP06

GoBright multi gateway Mesh to GoBright platform – up to 100 Connect devices per gateway

MGW101-DP08

GoBright multi gateway Mesh to GoBright platform PoE – up to 100 Connect devices per gateway

TECHNICS

Inputs

1 input for connection cable, 1 input for GoBright Glow

Networking

Mesh networking to GoBright multi gateway

Actuator systems

LINAK CBD6S control box, LINAK DL series (with DC T-splitter)

NFC/RFID

13.56 MHz ISO14443-3A(MIFARE), ISO14443-3B(FeliCa), ISO14443-3F and ISO15693, UID reading capable

MOUNTING

Mounting

In desk, diameter 80 mm

Thickness desk top


12 – 30 mm

Dimensions Connect

102 mm x 102 mm x 37 mm (L x W x H)

Installation depth

35 mm

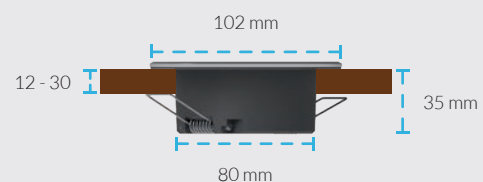

GENERAL

Guaranty

1 year

CE-standardization

Yes

*10 pack

One package contains 10 units

Specifications subject to change without notice